

KC-X Tanker Replacement Program: Value of Flexibility



Winchesley "Chez" Vixama

Fall 2008

Table of Contents

<i>Motivation</i>	3
1.0 Background.....	3
1.1 Competing Designs	4
1.2 Cost and Production Schedule Data	5
2.0 Defining the Salient Uncertainties	6
2.1 Demand Uncertainty	6
2.2 Oil Price Uncertainty	7
3.0 System Design Definition	8
3.1 Analytic Framework.....	8
3.1.1 <i>DAPCA Model</i>	8
3.1.2 <i>Fuel Price Model</i>	9
3.1.3 <i>Demand Model</i>	9
3.2 Decision Framework	9
4.0 Decision Tree Analysis	9
4.1 Fuel Cost Forecast Modeling.....	11
4.2 Demand Modeling	13
4.3 Expected Value Determination	13
4.3.1 <i>Inflexible Design</i>	13
4.3.2 <i>Flexible Design</i>	14
5.0 Lattice Analysis	16
6.0 Lattice Valuation	18
7.0 Conclusion	19

KC-X Tanker Replacement Program:

Value of Flexibility

Motivation

This report encapsulates an investigative process focused on determining the value of imbedding flexibility in the production buy schedule of the proposed US Air Force KC-X tanker aircraft. The current arrangement locks the United States Government (USG) into a long-term, deterministic financial agreement which fails to account for future uncertainty. The forces of uncertainty may prevent USG from acting upon future opportunities or responding to unforeseen demands and requirements. Flexibility may be added to this agreement by either delaying the purchase decision and/or allowing the USG to modify the production quantity. Although such a change in the contractual agreement is mistakenly believed to be constrained by the notion of the “cost of flexibility”, the value of this action may be significant enough to warrant a more thorough review of this option.

1.0 Background

The KC-X program is the first of three acquisition programs the Air Force will need to replace the entire fleet of aging KC-135 Stratotankers, which have been in service for more than 50 years. The primary mission of the KC-X will be to provide aerial refueling to United States military and coalition aircraft. However, the Air Force also intends to take full advantage of the other capabilities inherent in the platform, such as airlift, and make it an integral part of the Defense Transportation System.¹

Release of the KC-X request for proposal (RFP) in January 2007, initiated a chain of events designed to produce a fair, full and open competition focused on the selection and production of a flexible and versatile platform. The submission of each contractor is evaluated by a specific set of criteria documented in the RFP. Combined with such factors as cost and past performance records the selection committee will determine which option produces the optimal blend of cost, schedule, and performance. The ultimate goal is to select the product which delivers the best value to the customer. The RFP stipulated nine primary key performance parameters (KPP):

KPPs of the KC-X
Air refueling capability (same sortie boom and drogue capable)
Fuel offload and range at least as great as the KC-135
Compliant CNS/ATM equipment
Airlift capability
Ability to take on fuel while airborne
Sufficient force protection measures

¹ Office of the Assistant Secretary of Defense (Public Affairs), News Release No.113-07, Air Force Posts Request for Proposals for Tankers

Ability to network into the information available in the battle space
Survivability measures (defensive systems, EMP hardening, chem/bio protection, etc.)
Provisioning for a multi-point refueling system to support Navy and Allied aircraft

Table 1: KPP listing for future tanker design

1.1 Competing Designs

Two groups responded to and presented competing designs for the RFP. The Boeing Corporation presented the KC-767, a variant of the long-established 767 series. EADS/Airbus and the Northrop Grumman Corporation formed a joint venture and proposed the Airbus A330 Multi Role Tanker Transport (MRTT), based on the Airbus A330-200. Figure 1 and Table 2 present data on the relative sizes of the airframes and common parameters, respectively (Sources: Northrop Grumman KC-30², Airbus A330, KC-30 performance specifications³, KC-767 Advanced Tanker⁴, and Boeing 767 aircraft data⁵).

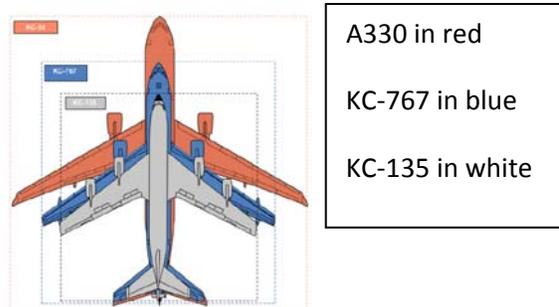


Figure 1: Aircraft Relative Size Comparison⁶

² http://www.airforce-technology.com/projects/a330_200/

³ <http://www.northropgrumman.com/kc30/performance/specifications.html>

⁴ KC-767 Advanced Tanker Product Card, http://www.boeing.com/ids/globaltanker/usaf/KC_767/767AdvProdCard.pdf

⁵ <http://www.boeing.com/commercial/airports/acaps/767sec2.pdf>

⁶ KC-X Tanker Replacement Program, <http://www.globalsecurity.org/military/systems/aircraft/kc-x.htm>

Parameter	A330 MRTT - KC-30	KC-767 Advanced Tanker
Length	192 ft 11 in (59.69 m)	159 ft 2 in (48.5 m)
Height	57 ft 1 in (16.9 m)	52 ft (15.8 m)
Wingspan	197 ft 10 in (60.3 m)	156 ft 1 in (47.57)
Surface area	3,892 ft ² (361.6 m ²)	3,050 ft ² (283.3 m ²)
Fuselage width	18 ft 6 in (5.64 m)	16 ft 6 in (5.03 m)
Fuselage height	18 ft 6 in (5.64 m)	17 ft 9 in (5.41 m)
Engines (2x)	RR Trent 700 or GE CF6-80 turbofans	Pratt & Whitney PW4062
Thrust (? 2)	72,000 lbf (316 kN)	63,500 lbf (282 kN)
Passengers	226-280[20]	190
Cargo	32 463L pallets	19 463L pallets
Maximum fuel capability	250,000 lb (113,500 kg)	202,000+ lb (91,600 kg)
Max Takeoff fuel load	241,400 lb (109,500 kg)	202,000+ lb (91,600 kg)
Range	6,750 nmi (12,500 km)	6,590 nmi (12,200 km)
Cruise speed	Mach 0.82 (534 mph, 860 km/h)	Mach 0.80 (530 mph, 851 km/h)
Max speed	Mach 0.86 (547 mph, 880 km/h)	Mach 0.86 (570 mph, 915 km/h)
Max takeoff weight	507,000 lb (230,000 kg)	400,000+ lb (181,000 kg)
Max landing weight	396,800 lb (180,000 kg)	300,000 lb (136,000 kg)
Empty weight	265,657 lb (120,500 kg)	181,600 lb (82,400 kg)

Table 2: Aircraft Specification Data

1.2 Cost and Production Schedule Data

The effort is contracted to produce 179 aircraft and is worth \$40B. The Government will procure up to 179 KC-X aircraft over a 15-20 year period. SDD, which includes the manufacture of four (4) test aircraft, is scheduled to start in FY07, and low-rate initial production (LRIP) is projected to start in FY10. Engines for the SDD aircraft will be contractor-furnished equipment. The initial contract will develop the KC-X and procure up to a total of 80 SDD and production aircraft. The remainder will be procured through follow-on contracts. The new tanker, called the KC-45A, is expected to enter the test phases in 2010 with the first mission-capable aircraft ready by 2013⁷.

The most recent update to the KC-X RFP provides the following data on the acquisition's production schedule.

⁷ USAF Secretary Press Briefing, 4 March, 2008, <http://www.af.mil/news/story.asp?id=123088862>

Production Buy Schedule (excluding 4 retrofit aircraft)

Buy Qty	FYXX	Total													
	7	12	15	15	15	15	15	15	15	15	15	15	15	6	175

Note: Schedule should be predicated on bidders IMS and entrance criteria for LRIP

Retrofit Schedule

Buy Qty	FYXX	Total												
			4											4

Figure 2: KC-X Production Buy Schedule

Airframe	Unit Cost(\$US in millions)
767-200 ⁸	\$130.5 -- \$150.5
A330-200 ⁹	176.3 to \$185.5

2.0 Defining the Salient Uncertainties

The procurement of the KC-X Tanker represents a significant investment that has and will continue to demand a great deal of scrutiny and oversight. One of the primary areas of interest will be the level of risk inherent in this development effort.

The effort will try to determine which of the two design options (Boeing-767 or Airbus-330) presents the best technical approach to replacing a fleet of 179 tanker aircraft. In order to do this, this study will analyze the affects of uncertainty from the following sources:

- The uncertainty in demand inherent in the forecast of how many aircraft will be needed
- Uncertainty in the price of oil

2.1 Demand Uncertainty

The nominal production schedule is based upon a forecasted need for 179 aircraft. However, there is uncertainty as to whether this number accurately captures the true needs of the United States Air Force (USAF).

In 2000, the USAF initiated an effort, Tanker Requirements Study-05 (TRS-05), to assess the health of the tanker aircraft fleet and identify the requirements needed to modernize the fleet. The study and a subsequent effort in 2004 were never completed. As a result, there is no quantified analysis upon which “to base the size and composition of either the current fleet or a future aerial refueling force.”¹⁰

⁸ Source: Boeing.com

⁹ Source: Airbus Aircraft Range of 2008 List

Prices, http://www.airbus.com/store/mm_repository/pdf/att00011726/media_object_file_ListPrices2008.pdf

¹⁰ Government Accountability Report, GAO-03-938T, Testimony before the Subcommittee on Projection Forces, Committee on Armed Services, House of Representatives, 24 June 2003.

Beyond this, the forecast of 179 aircraft used in the current tanker procurement process does not account for significant changes in the structure and operational tempo of the USAF that have occurred since 2000. TRS-05 preliminary results were based on the then Soviet Era Cold-War construct of being able to support two major theatre wars. Since that time, the Soviet Union has expired and US military operations have been characterized by mid-level operations in multiple, regional conflicts. The ever-changing and protracted levels of engagements bring appreciable doubt to the accuracy of 179-tanker aircraft forecast. With an average age of nearly 50 years per aircraft, modernization of the tanker fleet could require as many as 500 aircraft. On the other hand, if the findings of a recent Rand study are followed, the demand may be met by simply refurbishing older, less sophisticated aircraft. If this is true, the true forecast may be significantly lower than 179.

To account for this uncertainty, the forecasted demand needs to be modeled and incorporated in the analysis. For the purposes of this effort, the maximum demand will be assumed not to exceed the overall fleet size (545 aircraft) and not go below 79 aircraft. Modeling the distribution of the demand will be more difficult. A simple random (normal) distribution will be initially used. Other distributions will be reviewed and considered for suitability.

2.2 Oil Price Uncertainty

In addition to transporting oil, each tanker aircraft consumes oil. Each design option has a unique fuel consumption rate. The consumption of fuel implies a significant cost that needs to be factored in the overall NPV analysis. The seismic shifts in the price of oil contribute a high level of uncertainty to this study.

However, previous research demonstrates that this area of uncertainty can be mitigated. The price of fuel can be forecasted using historical data from the various oil price indices on the web (IndexMundi, EIA, or IATA) and through the use of a stochastic model.

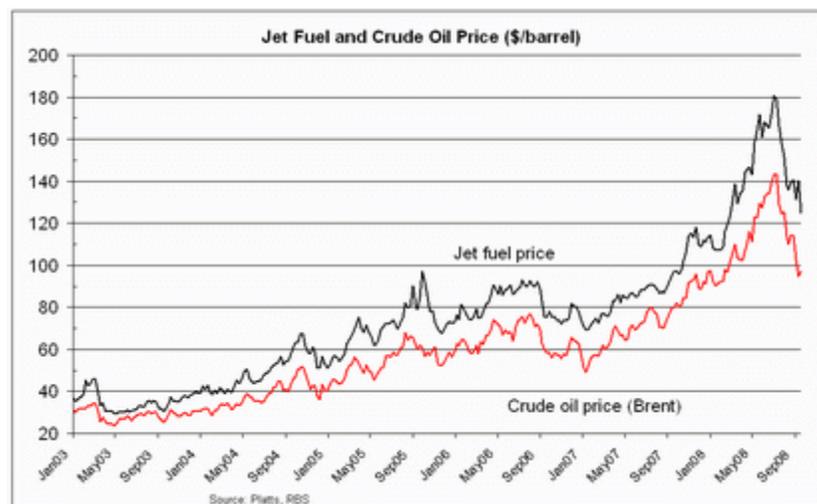


Figure 3: Jet Fuel and Crude Oil Price Data

3.0 System Design Definition

The following scenarios will be used to evaluate the value and opportunity costs inherent in the selection and production of the nominated aircraft system.

1. **Inflexible:** Purchase full lot of 179 Boeing, 767 aircraft at the given production rate
2. **Flexible:** Purchase 79 Boeing 767 aircraft at the given production rate. Re-evaluate decision to purchase remaining 99 based on oil prices and US government update to actual demand during the sixth fiscal year of production. After re-evaluation, the following outcomes are possible in this scenario:
 - a. Continue with purchase of (no more than) 99 Boeing 767 aircraft
 - b. Purchase up to 99 Airbus 330 aircraft
 - c. Discontinue the purchase of the remaining 99 aircraft if total cost exceeds the Nunn-McCurdy cost limit of the program (15% cost overrun) or if the adjusted demand no longer warrants production of additional aircraft. In the latter situation, the contractor will receive a compensatory payment not to exceed 20% of the profit from the production of 79 aircraft.

The scenarios are based on several assumptions. First, each production lot is homogenous. The military philosophy of standardization requires this simplification. To do otherwise would create unnecessary duplication in the establishment of maintenance, training, and production infrastructure. Secondly, the analysis will utilize the modified DAPCA (Development and Procurement Costs of Aircraft) IV Cost model to calculate the overall Net Present Value cost of each scenario. The DAPCA IV¹¹ model was developed by RAND Corporation. Details of the DAPCA model are provided in the Analysis Section.

3.1 Analytic Framework

3.1.1 DAPCA Model

DAPCA IV is a computer program that is used to determine the development and production costs of an aircraft. This study will use a modified version of the DAPCA IV model to calculate the total cost of the KC-X tanker aircraft. The total cost will be the sum of unit cost and variable costs. The variable costs will be defined by operations and maintenance costs (fuel costs), development support costs, flight test costs, manufacturing materials costs. The variable costs can all be expressed in terms of the aircraft's parameters. For example, the manufacturing materials cost (C_M) = $11W_e^{0.921} * V^{0.621} * Q^{0.799}$ where

W_e = aircraft empty weight (lb)

V = maximum velocity (knots)

¹¹ Hess, R.W. and Romanoff, H.P., "Aircraft Airframe Cost Estimating Relationships," Rand Corp., Rept. R-3255-AF, Santa Monica, CA, 1987.

Q = production quantity

With the DAPCA IV model approximations, the NPV of the cost of each design option can be determined and compared.

3.1.2 Fuel Price Model

The price of fuel can be forecasted using data from the various oil price indices on the web (IndexMundi or IATA) and through the use of a stochastic model. Since the forecast will consist of a trend + uncertainty, we can use a geometric Brownian motion model:

$$dS = \mu S dt + \sigma S dz$$

where S is the fuel price, μ is the expected change in the fuel price, σ is the volatility of the fuel price, and dz is the basic Wiener process.¹² As such, we should be able to apply an iterative technique to forecast fuel prices just as we did in the ESD.70 module to forecast Google returns.

Fuel price is being considered because it will be a variable cost in the long-term operating costs of the aircraft. The aircraft under consideration can carry different amounts of fuel and have different fuel burn rates. These differences may affect the overall NPV and should be considered in the analysis. In this analysis, the aircraft will be assumed to have a lifetime of 25 years.

3.1.3 Demand Model

The flexible options analysis will require the use of a demand model. The demand in each year after the sixth fiscal year can randomly range from a low of 0 to a high of 30. One possible model to achieve this can be expressed as:

$$D_i = \text{RAND}() * (b-a) + a$$

where a and b represent the possible range restrictions on demand outcomes.

3.2 Decision Framework

The system specifications combined with the DAPCA and Fuel Price models will enable the calculation of an NPV for each scenario. The NPVs will be a measure of the cost of each approach in terms of demand expectation, production quantities, and investment costs, and total costs. The use of the NPVs in conjunction with a holistic review of the requirements should enable a judicious choice among the design options.

4.0 Decision Tree Analysis

Figure 3 presents the decision tree that was used for the evaluation of the design options.

¹² ESD.70 Lecture notes, Session 3, Slide 12

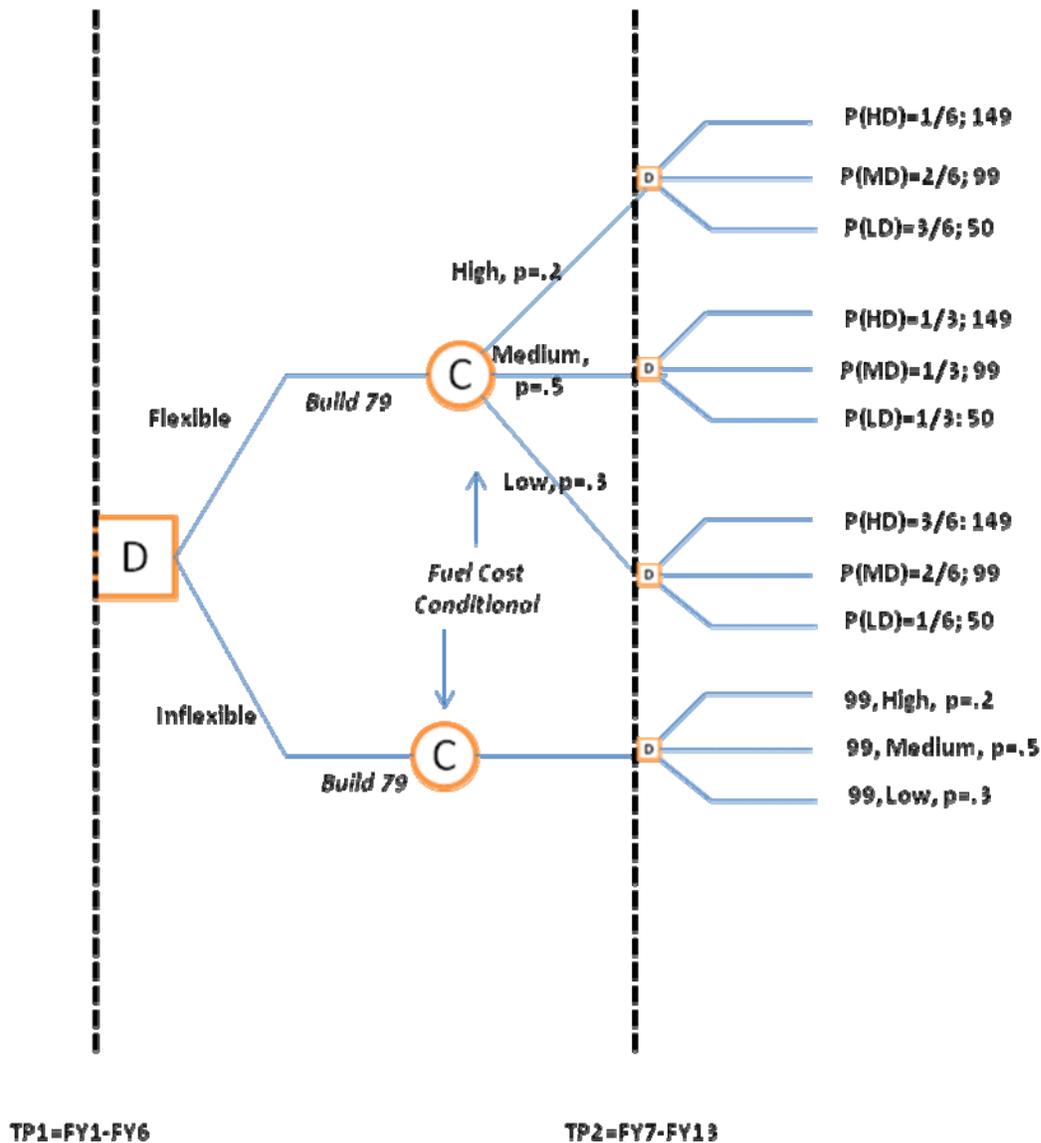


Figure 4: Decision Tree

The first period is a deterministic time frame in which 79 aircraft must be built. At the start of the 7th year, there are two design options: flexible vs. inflexible.

In the inflexible pathway, an additional 99 aircraft will be built regardless of demand or fuel cost uncertainties. The cost of this branch is a function of the unit cost of each aircraft and the total operating cost of fuel for these aircraft over an expected lifetime of 40 years. The fuel cost will be determined by using the price of fuel at the start of year 7. That price is subject to uncertainty (High, Medium, and Low) as represented in the above diagram. More details on the fuel price determination process are presented in section 4.1.

In the flexible pathway, the total cost of the second time period is determined by considering two points of uncertainty: demand and then fuel cost. The fuel cost uncertainty is categorized as High, Medium, and Low with an associated probability. Section 4.1 presents greater detail on


the stochastic modeling and Monte Carlo simulation used to determine the price of fuel at the start of the second time period. Similarly, the demand uncertainty is also modeled as High, Medium, and Low with an associated probability. Additional details on the demand likelihood determination is presented in section 4.2

4.1 Fuel Cost Forecast Modeling

As discussed in section 3.1.2, the price of fuel can be forecasted using data from the various oil price indices on the web (IndexMundi or IATA) and through the use of a stochastic model. Since the forecast will consist of a trend + uncertainty, we can use a geometric Brownian motion model:

$$dS = \mu S dt + \sigma S dz$$

where S is the fuel price, μ is the expected change in the fuel price, σ is the volatility of the fuel price, and dz is the basic Wiener process.¹³ Using this construct, an iterative technique was used to forecast fuel prices. Linear regression and exponential approximation produced the following results:

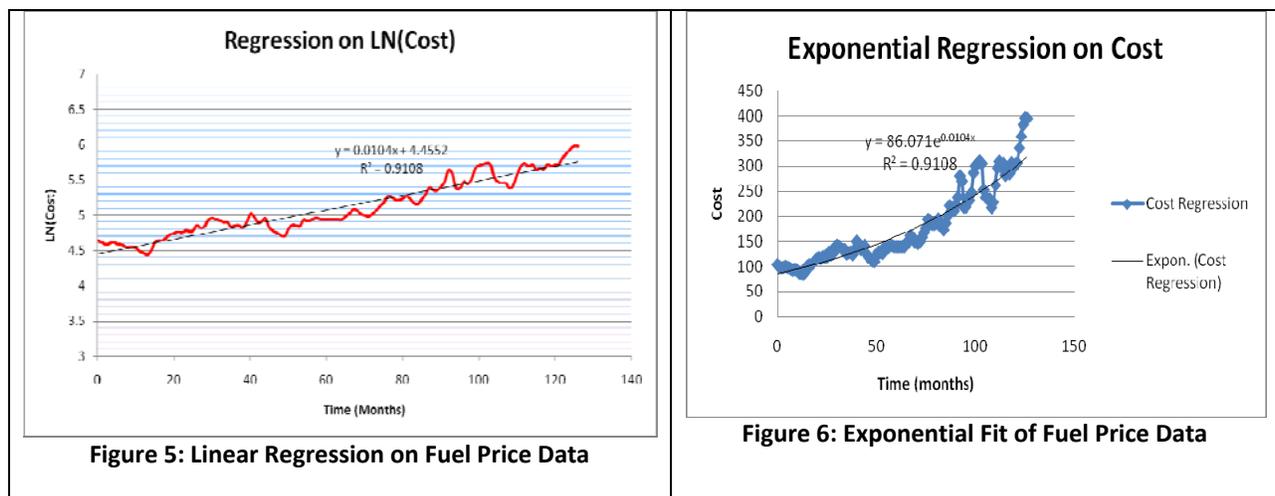

Regression Results				
Alpha (α)=	4.4552	=====>	$a = e^{\alpha}$	86.07336
Beta (β)=	0.010434	=>	average growth rate r per month	1.04%
Mean squared difference (variance σ^2) in %				1.450%
Standard deviation (volatility σ) in %				12.042%

Table 3: Regression Parameters

¹³ ESD.70 Lecture notes, Session 3, Slide 12

The fuel price at the end of the first period was used as the basis for the total fuel cost calculation. A Monte Carlo simulation of 995 runs was performed to produce an optimal estimation of this particular fuel price.

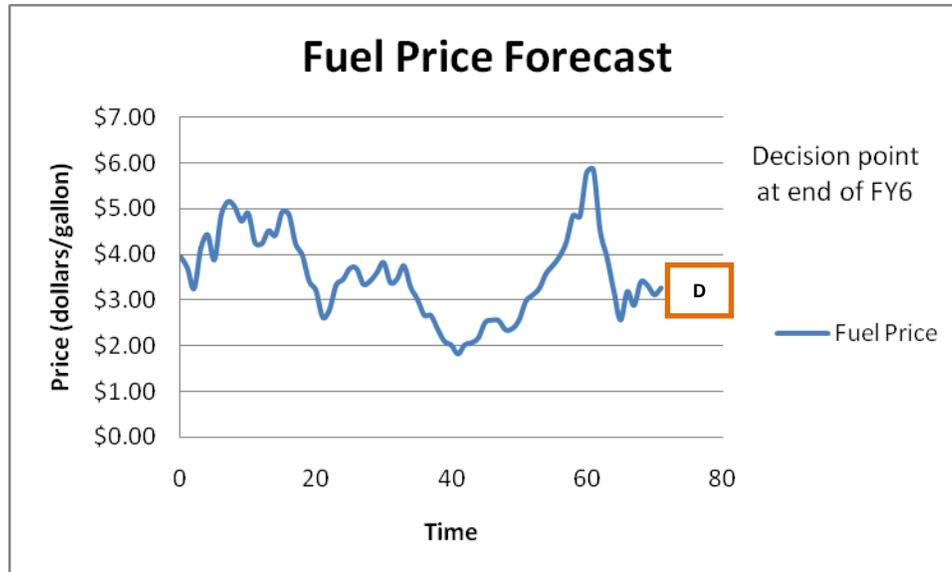


Figure 7: Fuel Price Forecast

Lastly, a probability distribution function was employed to produce a graduated characterization of fuel prices:

	Distribution	Threshold	Range	Price	Probability
10.00%	Chance of price below	135.6875	LOW	203.27	30%
20.00%	Chance of price below	202.1756	LOW		
30.00%	Chance of price below	270.8563	LOW		
40.00%	Chance of price below	357.2114	MED	417.50	50%
50.00%	Chance of price below	477.7984	MED		
50.00%	Chance of price above	477.7984	MED		
40.00%	Chance of price above	627.968	HIGH	2942.98	20.0%
30.00%	Chance of price above	859.0154	HIGH		
20.00%	Chance of price above	1178.125	HIGH		
10.00%	Chance of price above	1962.003	HIGH		
1.00%	Chance of price above	5257.996	HIGH		

Table 4: FY6 End Fuel Cost Characterization

In addition, the operations cost contribution due to fuel consumption was based on the following guidelines:

- Each aircraft will operate for 750 hours per year
- Each aircraft consumes 1722 gallons of jet fuel per hour

4.2 Demand Modeling

To perform the decision tree analysis, a simplified demand model was used to designate the possible demand levels as High, Medium, or Low with an associated probability and value. The model assumes:

- A High demand level is 50% above the original demand level
- A low demand level is 50% lower than the original demand level
- A medium demand level is equal to the original demand level.

Conditional Probability of Demand in Light of Fuel Cost			
Fuel Cost	P(HD/FC)	P(MD/FC)	P(LD/FC)
High	1/6	1/3	1/2
Med	1/3	1/3	1/3
Low	1/2	1/3	1/6

149	High Demand= Original requirement +50%
99	Medium Demand= original demand
50	Low Demand=original demand-50%
99	= Original Demand

Table 5: Demand Considering Fuel Price

4.3 Expected Value Determination

Final determination of the expected (cost) value of the design options is based on the parameter values obtained in sections 4.3.1 and 4.3.2

4.3.1 Inflexible Design

Table 4 presents the complete listing of parameters used to determine the total cost of the inflexible design during the second period.

Inflexible Design	Symbol	Value
Production Quantity (Phase 1)	Q1	79
Production Quantity (Phase 2)	Q2	99
Production cost (Phase 1)	IC1	\$1,187,833,735.00
Production cost (Phase 2)	IC2	\$1,422,538,829.89
Yearly operating hours per aircraft	YOH	750
Phase 2 Operating hours	Ph2YOH	74250
Fuel consumed per hour (Gallons/hour) per aircraft		1722
Total fuel consumed by all Phase 2 aircraft (Gallons/year)		127858500
Fuel Cost (cents per gallon)		
High	FH	2942.98
Medium	FM	417.50
Low	FL	203.27
Total Fuel Cost (dollars)		
High		\$150,514,109,307.44
Medium		\$21,352,620,733.85
Low		\$10,396,014,822.50
Fuel Cost Probability		
High	P(FH)	0.2
Medium	P(FM)	0.3
Low	P(FL)	0.5
Expected Total Cost (Phase 2, dollars)		\$41,706,615,492.90

Table 6: Inflexible Design Parameters

For period 2, the inflexible design has an expected cost value of \$41.7B.

$$EV_{nf} = .2(\$150.5B) + .3(\$21.3B) + .5(10.4B)$$

4.3.2 Flexible Design

Table 5 presents the complete listing of parameters used to determine the expected cost value of the flexible design during period 2. For this period, the inflexible design has an expected cost of \$39.2B.

$$EV_f = .2(\$127.1B) + .3(\$22.8B) + .5(13.8B)$$

$C_m = 11W_e^{0.921} \cdot V^{0.821} \cdot Q^{0.799}$					
Cost (dollars)	Cm				
Empty Weight(lb)	We	181600			
Max Velocity(knots)	V	495.3			
Production Quantity	Q				
Expected Service Life (years)	L	40			
Flexible Design					
Production Quantity (Phase 2)					
	Q2				
High Demand	Q2HD	149			
Medium Demand	Q2MD	99			
Low Demand	Q2LD	50			
Production cost (Phase 2)					
	IC2				
High Demand	PC2HD	\$1,972,093,209.95			
Medium Demand	PC2MD	\$1,422,538,829.89			
Low Demand	PC2LD	\$824,192,470.75			
EV of Production Cost	EVPC	\$0.00			
Yearly operating hours per aircraft	YOH	750			
Production Probability if High Fuel cost					
			Node Contribution	Expected Production Quantity	Expected Production Cost
High Demand	P(HD/HF)	0.166666667	25	83	\$1,233,665,770.
Medium Demand	P(MD/HF)	0.333333333	33		
Low Demand	P(LD/HF)	0.5	25		
Production Probability if Medium Fuel cost					
			Node Contribution	Expected Production Quantity	Expected Production Cost
High Demand	P(HD/MF)	0.333333333	50	99	\$1,426,364,501.
Medium Demand	P(MD/MF)	0.333333333	33		
Low Demand	P(LD/MF)	0.333333333	17		
Production Probability if Low Fuel cost					
			Node Contribution	Expected Production Quantity	Expected Production Cost
High Demand	P(HD/LF)	0.5	75	116	\$1,612,703,836.
Medium Demand	P(MD/LF)	0.333333333	33		
Low Demand	P(LD/LF)	0.166666667	8		
Fuel Cost Determination					
Phase 2 Operating hours					
	Ph2YOH				
High Demand	Ph2OHHD	62125			
Medium Demand	Ph2OHMD	74500			
Low Demand	Ph2OHLd	86875			
Fuel consumed per hour (Gallons/hour) per aircraft		1722			
Total fuel consumed by all Phase 2 aircraft (Gallons/year)					
High Demand	TFCHD	106979250			
Medium Demand	TFCMD	128289000			
Low Demand	TFCLD	149598750			
Fuel Cost (cents per gallon)					
High	FH	2942.98			
Medium	FM	417.50			
Low	FL	203.27			
Total Fuel Cost (dollars)					
High		\$125,935,205,935.69			
Medium		\$21,424,515,079.76			
Low		\$12,163,687,376.50			
Fuel Cost Probability					
High	P(FH)	0.2			
Medium	P(FM)	0.3			
Low	P(FL)	0.5			
Expected Total Cost (Phase 2, dollars)					\$39,177,233,822.13

Table 7: Flexible Design Parameters

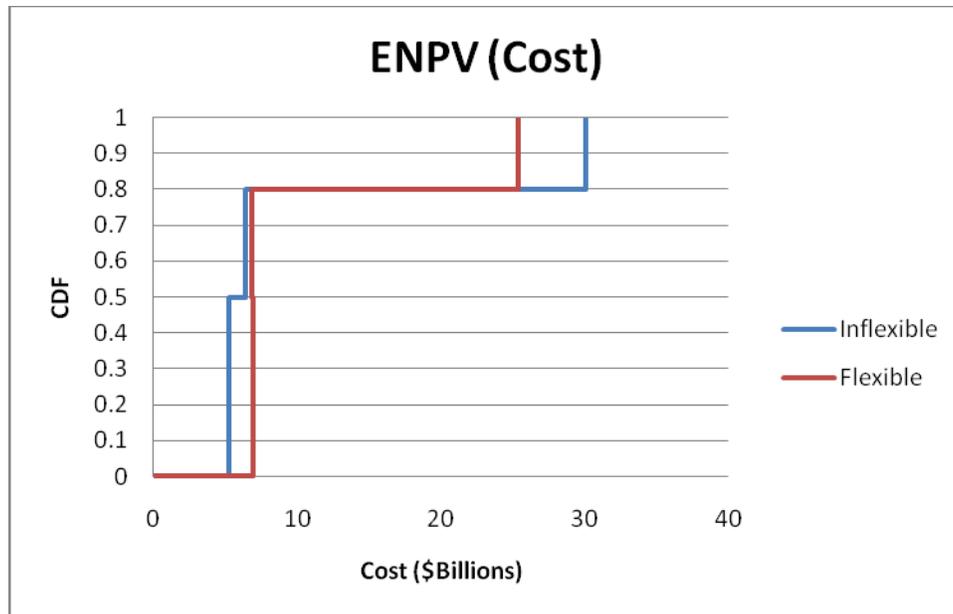


Figure 8: ENPV (Cost), Flexible vs. Inflexible Design

The analysis suggests that the flexible design option is the better of the two approaches. By choosing this path, the decision maker will obtain an expected cost savings of approximately \$1.4B. This is the optimal strategy at the start of period 2; flexible is better. Figure 8 presents a Value at Risk Gain distribution for cost of this scenario and demonstrates that the flexible option minimizes the upside cost.

5.0 Lattice Analysis

A binomial lattice model can also be used as a comparative analysis method. In this analysis, the lattice models the movement of jet fuel price over time by considering the movement of the price at each time node. In the binomial model, the price is assumed to only be allowed to either take an "up" step or a "down" step, where these steps are given as:

$$u = e^{(\sigma \sqrt{\Delta t})}$$

$$d = 1/u$$

where σ represents the volatility (i.e. standard deviation) of the observed price movements. As such, if the value of the current node is defined as Q_N , it is defined as either $(Q_{N-1}) * u$ or $(Q_{N-1}) * d$.

In addition, the lattice can be used to determine the probability associated with each price at a particular node. Unlike the values of the individual prices, the values of the probabilities are not path independent. The probabilities in any time period must sum to 1. As such, the probability at a particular node is determined from the following expression:

$$p = 0.5 + 0.5 (v/\sigma) * (\Delta t)^{1/2}$$

where v is the average rate of change of the observed quantity, the price of jet fuel in this analysis. Table 6 presents a summary of all the parameters used to define the binomial lattice.

Starting Fuel Price (\$ per gallon)	Growth Rate	Volatility	"Up" step (u)	"Down" step (d)	Probability of "Up" (p)	Probability of "down" (1-p)
3.96	1.45%	12.04%	1.13	0.889	0.56	0.44



Table 8: Binomial Lattice Parameters

The volatility and growth rate were determined using both a linear and exponential regression on the price of jet fuel during an 11 year period.


Based on these values and the guidance on lattice development, the following binomial lattices were constructed.

OUTCOME LATTICE (Jet Fuel Price, \$ per Gallon)						PROBABILITY LATTICE					
3.96	4.46	5.03	5.68	6.40	7.22	1.00	0.56	0.31	0.18	0.10	0.06
	3.51	3.96	4.46	5.03	5.68		0.44	0.49	0.41	0.31	0.22
		3.11	3.51	3.96	4.46			0.19	0.33	0.36	0.34
			2.76	3.11	3.51				0.09	0.19	0.27
				2.44	2.76					0.04	0.10
					2.17						0.02

The lattices represent the possible outcome of fuel prices over the next 5 periods. Using these values, graphs of the outcomes and associated probabilities were also created.

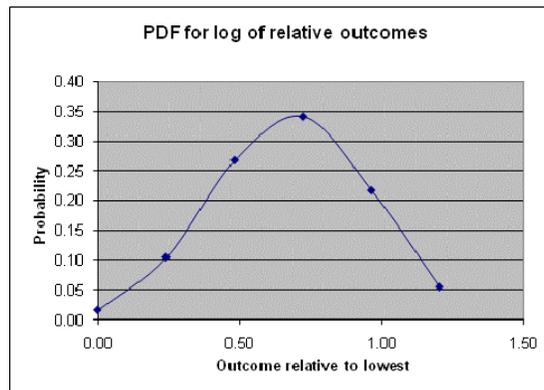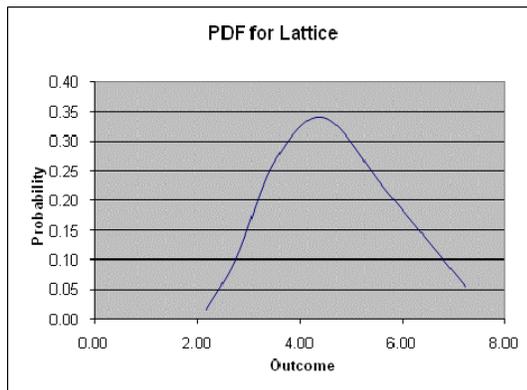

Similarly, a cumulative probability distribution of expected fuel prices at the final stage can be created. For that stage, the average expected value is \$4.41 per gallon.

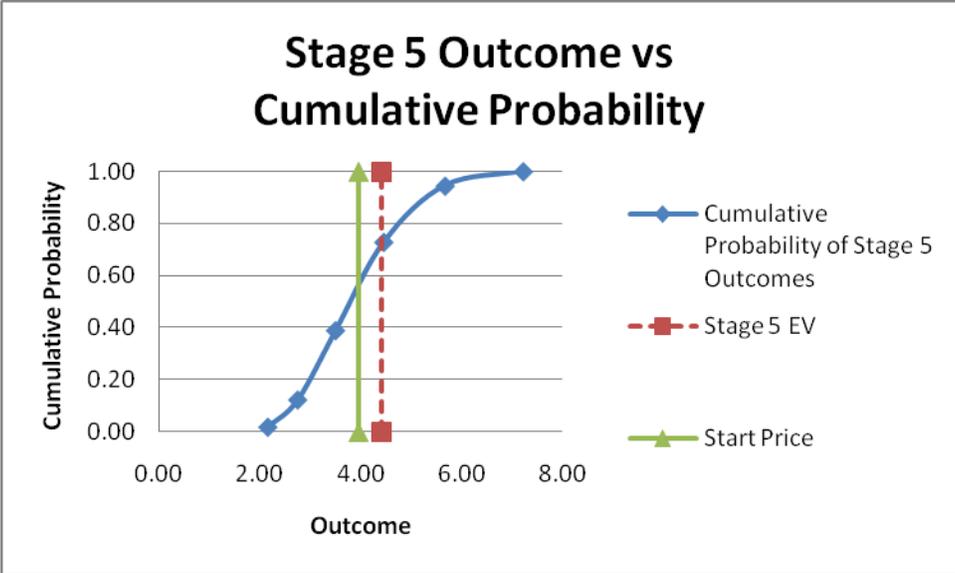

6.0 Lattice Valuation


A Lattice Model analysis was used to determine the value of flexibility using fuel price as the sole source of uncertainty. In such an approach, the outcome lattice is used in a decision analysis to determine the build level for each state.

A HIGH-MEDIUM-LOW criteria was applied to each node. Once the build level and quantity were determined, the total fuel cost of the node (based on a 40 year lifetime) was then be calculated. For this analysis, the following criteria for build level was used:

Price Range	Price	Build Level	Build
LOW	≤ 2.71	HIGH	149
MED	$\$2.72 \leq \6.27	MED	99
HIGH	$\geq \$6.28$	LOW	50

Table 9: Fuel Price to Demand Correlation

For the flexible case, application of the build criteria yields the decision lattice:

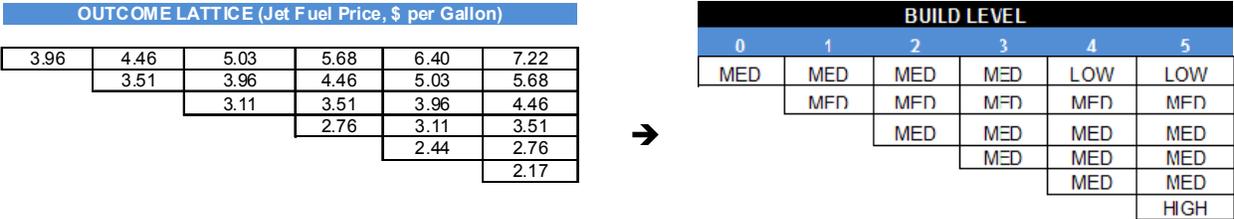

In the inflexible case, each node is locked to a build level of MEDIUM (99 aircraft) regardless of the price of jet fuel.

The expected value of each node was then determined by using the fuel cost, associated probability, build quantity, and system inputs of each node. The expected value represents a probability weighted, total operational cost of fuel based on 750 hours of flight operations per year and a fuel consumption of 1722 gallons per hour. The results for the flexible case are shown in figure X using a discount rate of 27%.

Probability Weighted, Fuel Cost, \$M (FLEXIBLE CASE)						
0	1	2	3	4	5	
0	\$ 319.54	\$ 201.91	\$ 127.59	\$ 40.72	\$ 25.73	
	\$ 197.16	\$ 249.17	\$ 236.18	\$ 198.99	\$ 157.17	
		\$ 76.87	\$ 145.73	\$ 184.17	\$ 193.96	
			\$ 29.97	\$ 114.02	\$ 119.68	
				\$ 17.59	\$ 36.92	
					\$ 6.86	

Discount Rate = 27%

EV (Cost)	\$0.00	\$516.70	\$527.96	\$539.47	\$555.49	\$540.33
PV (Cost)	\$0.00	\$406.85	\$327.34	\$263.36	\$213.53	\$163.54
NPV (Cost)	\$1,374.63					

=====

Probability Weighted, Fuel Cost, \$M (NO FLEXIBILITY)						
0	1	2	3	4	5	
0	\$ 319.54	\$ 201.91	\$ 127.59	\$ 80.62	\$ 50.95	
	\$ 197.16	\$ 249.17	\$ 236.18	\$ 198.99	\$ 157.17	
		\$ 76.87	\$ 145.73	\$ 184.17	\$ 193.96	
			\$ 29.97	\$ 75.76	\$ 119.68	
				\$ 11.69	\$ 36.92	
					\$ 4.56	

Discount Rate = 27%

EV (Cost)	\$0.00	\$516.70	\$527.96	\$539.47	\$551.23	\$563.24
PV (Cost)	\$0.00	\$406.85	\$327.34	\$263.36	\$211.89	\$170.48
NPV (Cost)	\$1,379.93					

The results indicate that the inflexible option carries a cost of \$1,379.93M. The flexible option reduces this cost to \$1,374.63M. The value of flexibility is \$5.3M.

7.0 Conclusion

The goal of this effort was to determine the potential value in changing the contract structure of the KC-X tanker aircraft purchase agreement from a fixed (deterministic) to a flexible construct. The study utilized two analytical approaches to determine and compare the expected net present value (cost) of both strategies. In each analysis, the flexible option did indeed produce procurement and operational cost savings on the order of 1 to 6%. For a system with an expected price tag near \$40B, the potential savings are noteworthy and, at a minimum, provide support for further examination on the use of flexibility in this and future purchase agreements. Such a change may also offer the means to affect significant, positive change in the Air Force's acquisition process and should be pursued.